



JR-1200DC Series


12V DC Camera Power Supplies

LIGHT AND COMPACT

**4, 8 OR 16 CAMERA
OUTPUTS**

**SELF-RESETTING
SMARTFUSES**

OUTSTANDING VALUE

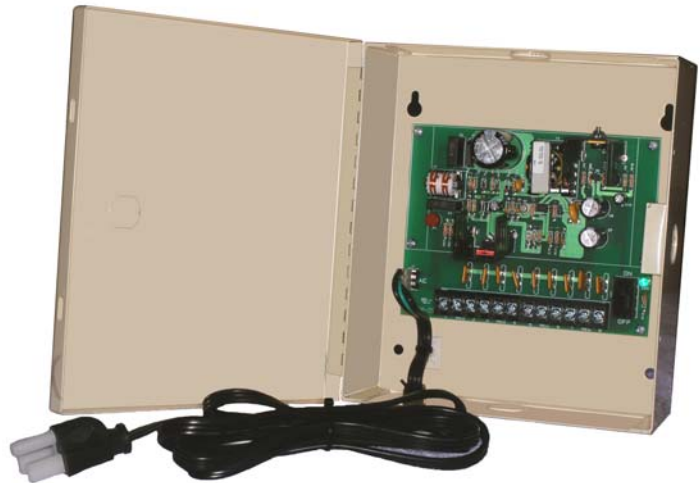

The JR-1200DC series of 12V DC camera power supplies provides a unique series of features which allow easier installation, greater reliability and unequalled flexibility. They are ideal in any multi-camera installation, avoiding the need to tie up one electrical outlet per camera, and provide significant advantages over multiple plug-in transformers in safety, convenience, neatness and cost.

Smaller and Lighter

The JR-1200DC series uses an innovative offline design, which eliminates the need for bulky and heavy open-frame transformers. This allows the products to be smaller and lighter than traditional camera power supplies, saving on shipping costs and making the product ideal wherever size and available space are important.

Outstanding Value

The JR-1200DC's efficient design makes it extremely cost-effective without compromising quality.

Easy to Install

A six foot power cord is supplied ready-attached. Just plug the power supply into the wall.

Protected by Self-Resetting Fuses

All models provide multiple outputs, protected by Stealth Labs' self-restoring *SmartFuses*. These react like a glass fuse but reset themselves when the surge has passed or the fault is removed, eliminating costly service calls to replace blown fuses. Surge suppression is also provided on board.

SPECIFICATIONS

Models Available:

JR-1240DC: 4 outputs, 2.5A total power at 12V DC

JR-1280DC: 8 outputs, 2.5A total power at 12V DC

JR-1216DC: 16 outputs, 5A total power at 12V DC

Input Voltage: 110 V AC

SmartFuse Rating: 1.1 Amps per output.

Can Dimensions:

JR-1240DC & JR-1280DC: 7 x 8 x 2.5 inches.

JR-1216DC: 11¼ x 11¼ x 3½ inches.

Weight

JR-1240DC & JR-1280DC: 2.5 lbs..

JR-1216DC: 3.5 lbs

