




STEALTH
LABORATORIES

“CATEGORY 5” CONNECTION MODULES

FOR STRUCTURED CABLE APPLICATIONS

**STANDARD “FOOTPRINT” FITS A
VARIETY OF CABINETS**

**FITS STANDARD 2.75” SNAP-
TRACK**

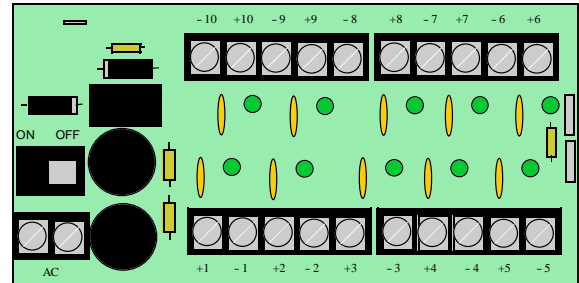

As more security and surveillance systems are incorporated into the structured cable environment, it is increasingly important to provide an easy means of connecting peripheral devices to a hub. At Stealth it is our aim to make your life easier by integrating power supply and camera connections on a single universally applicable board.

Stealth CAT-5 connection modules provide a convenient and economical way to connect a variety of CAT-5 devices, including CCTV cameras, audio inputs and speakers and low voltage AC and DC devices. With a standard size and footprint, the modules are easily combined and interchanged for a truly modular approach, allowing for future modifications and expansion. All modules fit standard 2.75 inch snap-track and are easily installed in a wide variety of cabinets used in structured cable applications.

C5TOF SERIES TRANSFORMERS

The C5-TOF series consists of 3 transformers to meet a variety of power requirements in CAT5 installations. Each transformer is mounted on a stainless steel plate with a screw hole for connection of earth ground and a convenient standard “CAT-5 footprint.”

- **C5TOF-1696:** 16V AC @ 100VA Output
- **C5TOF-1896:** 18V AC @ 100VA Output
- **C5TOF-2496:** 24V AC @ 100VA Output
- Dimensions 2.75 x 5.3 x 2 inches (l x b x h)

C5PS-10CAM 10 CAMERA POWER SUPPLY

The C5PS-10CAM provides connections to power up to 10 cameras on a board with a convenient standard “CAT-5 footprint.”

- Input Voltage: 16 to 18V AC @35VA
- Output 2.5 Amps at 12V DC
- 10 outputs, individually protected with self-resetting SmartFuses rated 400mA
- Each output has an individual LED indicator
- On/Off switch
- Maximum ripple 100mV pp.
- Transient protection
- Unique six-stage filtering circuitry
- Cool operation
- Screw terminals accept up to 12 AWG wire
- Dimensions 2.75 x 5.3 x 2 inches (l x b x h)

C5AUDIO-13 MODULE

The C5-AUDIO13 provides connections for an audio input from an amplifier and outputs to up to 3 speakers.

- 2 dual inputs
- 6 dual outputs
- Screw terminals accommodate up to 10 AWG wire
- Handles up to 10 Amps at 24V AC
- Standard “CAT 5 footprint.”
- Dimensions 2.75 x 5.3 x 2 inches (l x b x h)



STEALTH
LABORATORIES

600 Highland Avenue S.E., Hickory, NC 28601. Tel. 828-328-8674 Fax 828-328-1105 www.stealthlabs.com